




DigiLink DLC205 - Gig-E Aggregator and Optical Transceiver

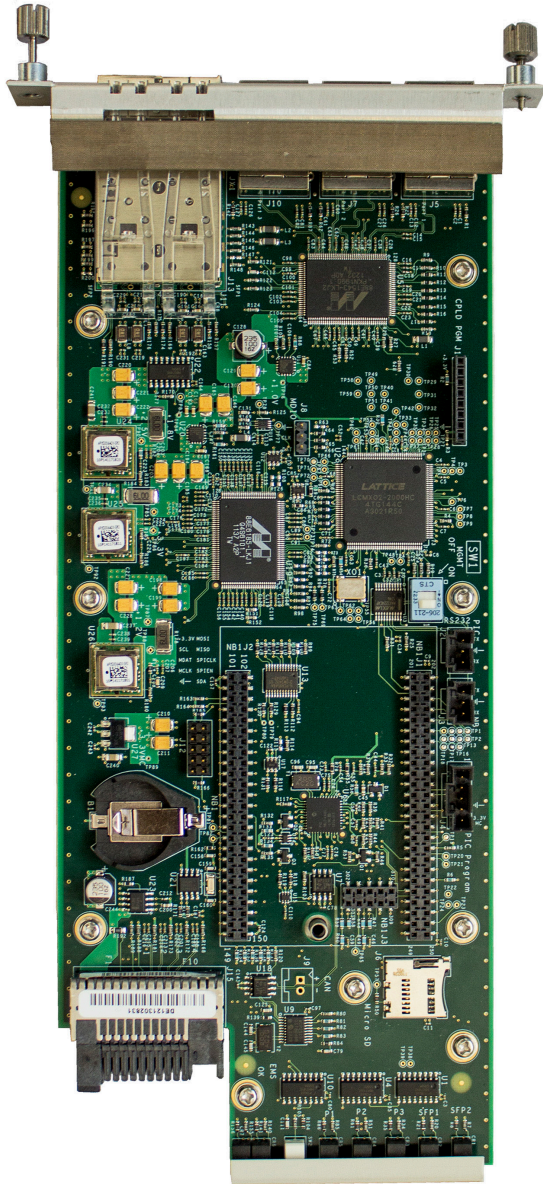

DLC205 Front Panel LEDs

LED	Function	Color	Description
OK	DLC205 Module Status	OFF	No power or fault
		● Green	No alarm, normal operation
		● Yellow	Minor alarm
		● Red	Major alarm
P1, P2, P3	Status of Each RJ-45 Port	OFF	Port disabled
		● Green	Link established
		✱ Green	Link established with data activity
		✱ Red	Loss link alarm, if enabled
SFP 1, SFP 2	Status of Each SFP Port	OFF	No SFP installed or SFP disabled
		● Green	Link established, no activity
		✱ Green	Link established with data activity
		● Yellow	RX optical power high
		● Red	TX/RX fault, or RX low optical power
		✱ Red	Loss link alarm, if enabled

✱ Flashing green | ✱ Flashing yellow | ✱ Flashing red

DLC205 Rear Panel LEDs

LED	Function	Color	Description
P1, P2, P3 Link	Port Status	OFF	Port disabled
		● Green	Link established
P1, P2, P3 Activity	Port Activity	OFF	Port disabled
		● Green	Activity on link
SFP1, SFP2 TX	SFP Laser Status	OFF	No SFP installed, or SFP disabled
		● Green	Normal operation
		● Red	SFP TX fault
SFP1, SFP2 RX	SFP Link Status	OFF	SFP disabled
		● Green	Link established
		✱ Green	Data activity
		● Yellow	RX optical power high
		✱ Red	SFP RX fault, low light or LOS
		● Red	Loss link alarm, if enabled

✱ Flashing green | ✱ Flashing yellow | ✱ Flashing red

Note: Refer to the DLC205/DLM205 Function Module Installation and Operations Manual for additional configuration and default settings.



Sales



T: 978-263-5775
www.artel.com
sales@artel.com
customer@artel.com